





ServiceMaster DSI
 2400 Wisconsin Ave, Downers Grove, IL 60515
 1-800-954-9444
 www.ServiceMasterDSI.com

CONTROLLED DEHUMIDIFICATION

MS 6000/5000 RC 2 Units

<u>MODEL</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
CDH-RC2-138	6,000/5,000*	Gas	100.25"	50"	96"	4,330 lbs.**
CDH-RC2-138	6,000/5,000*	Electric	100.25"	50"	96"	4,330 lbs.**
CDH-RC2-138	6,000/5,000*	Dual	100.25"	50"	96"	4,330 lbs.**

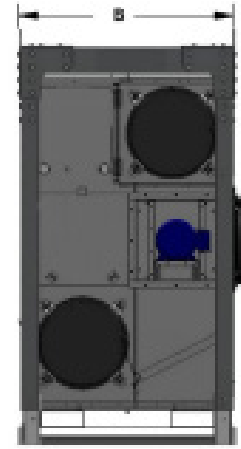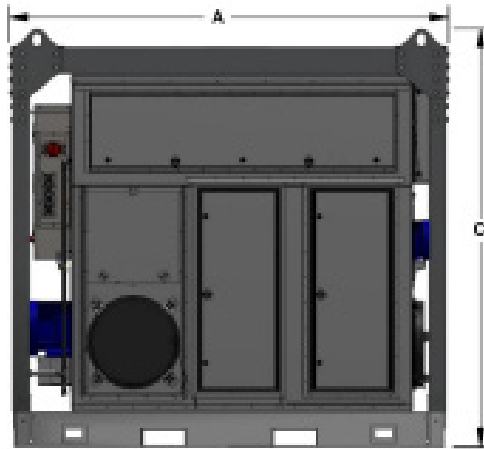

Max Air Volume	Moisture Removal Lbs/Hr 80°/60% RH	Moisture Removal Gallons/Day 80°/60% RH	Moisture Removal Lbs/Hr 55°/80% RH	Moisture Removal Gallons/Day 55°/80% RH	Moisture Removal Lbs/Hr 40°/80% RH	Moisture Removal Lbs/Hr 40°/80% RH
5,000 CFM	146	420	131	378	86	246
6,000 CFM	152	438	143	411	98	282

Model	Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation FLA Load 460/3/60	Gas Reactivation FLA Load 460/3/60	BTU Gas Max Usage NG	Gallon/HR Max Usage LP
Gas	3/4"	7-14" w.c.	7-14" w.c.	N/A	20.4	359	4.0
Electric	N/A	N/A	N/A	140.9	N/A	N/A	N/A
Gas/Elec	3/4"	7-14' w.c.	7-14" w.c.	140.9	20.4	359	4.0

Features:

- New Lighter Compact Design (Over 15% Less!!)
- Compact Layout (Unit length less than truck deck width)
- 16 GA. Stainless Steel Exterior Construction
- Remote Humidistat Option
- Double Wall Insulated Panels
- 7.5" of ESP Now Standard
- Actual CFM Measured and Displayed (With VFD Option)
- Trailer Mounting
- 18" or 20" Round Connections
- Lifting/Stacking Cage Option (as shown)
 - *6000 CFM @ 2" of W.C. or 5000 CFM @ 7.5" W.C. ESP
 - ** Deduct 620 lbs. for removal of Protective Cage